

BY PROMOVEC

GRAPHIC STEM

SPECIFICATIONS

Assist	5 steps
Battery	5 levels
Light on/off	Yes
Walk-assist	Yes
Protocol	V2
Plug	IP 66
Rated voltage	36V/48V
Weight	495 g

INTERFACE

Screen	LCD
Display type	2.0"IPSTFT
Display resolution	240×320 RGB
Connector	V2
Buttons	5
Throttle	Yes



TESTS & CERTIFICATIONS

IP	IP 65
Certifications	CE/EN 15194 Rohs


STANDALONE INTERFACE

Speed display	Yes (km/h and mp/h)
Battery indicator	Yes
Assist level	Yes
Walk assist	Yes
Light controls	Yes
Riding modes selection	Yes
Error code indicator	Yes
Auto-configurability	Yes

MOUNTING PARAMETERS

Dimension A	132 mm
Dimension B	54 mm
Dimension C	40 mm
Dimension D	30 mm
Dimension E	81 mm
Dimension F (Handlebar)	32 mm
Dimension G (Stem)	35 mm
Dimension H	98 mm

DIMENSIONS

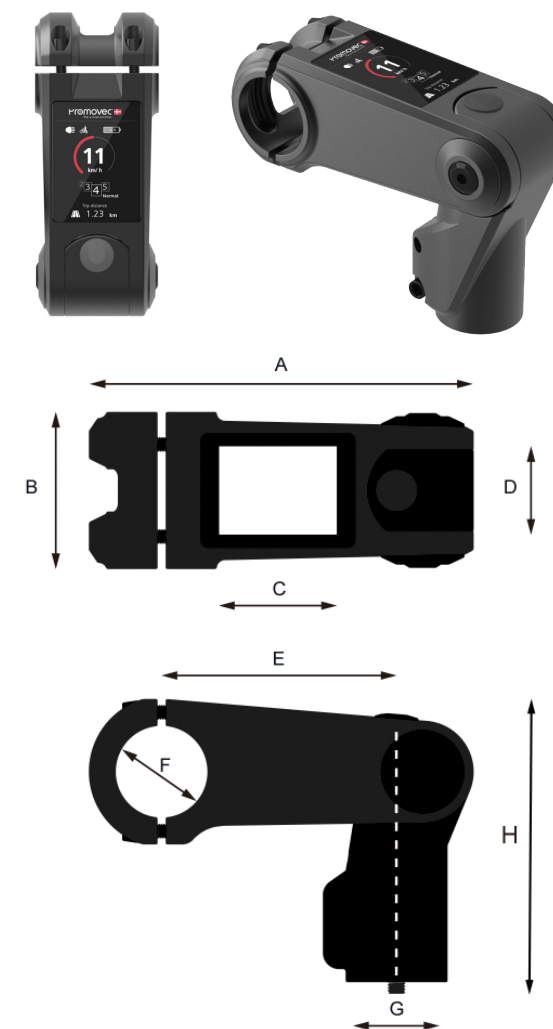

Promovec A/S
Langdyssen 6
DK-8200 Aarhus N

TEL. +45 7027 2623
FAX. +45 7027 2429
MAIL info@promovec.dk

Promovec® 
the e-bike solution