

# CHAINCASE BATTERY

## SPECIFICATIONS

Rated voltage	<b>36 V</b>
Com. Protocol	<b>RS-485/UART</b>
BMS	<b>Smart BMS</b>
Voltage scope (V)	<b>31 - 42V</b>
Charge mode	<b>CC-CV (Type A Promovec charger)</b>
Operation temperature charge	<b>0°C - 45°C</b>

## MOUNTING PARAMETER

Position	<b>Chaincase</b>
Weight (kg)	<b>1,9</b>
Controller position	<b>Center (chaincase)</b>
Charger	<b>Promovec charger, Small circular</b>

## MOUNTING

Chaincase	<b>50630 (see frame catalogue)</b>
-----------	------------------------------------

## BATTERY OPTIONS


Part No.	Name	Capacity
50246-C	CC	9,6Ah, 36V, 345Wh

Available in different colors.

## TESTS & CERTIFICATIONS

IP	<b>IP 65</b>
Certifications	<b>CE / EN 15194/ ROHS / REACH UN 38,3, MSDS</b>

## DIMENSIONS

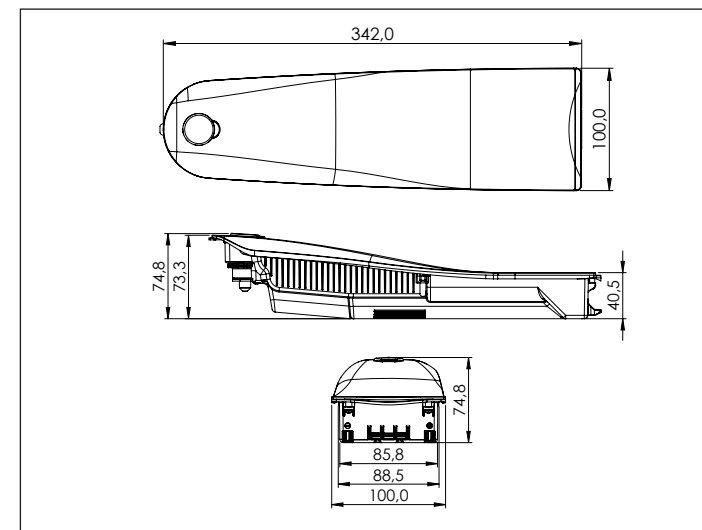

Promovec A/S  
Brunbjergvej 2  
DK-8240 Risskov

TEL. +45 7027 2623  
FAX. +45 7027 2429  
MAIL info@promovec.dk

Promovec®   
sustainable e-bikes