

DOWNTUBE 1 BATTERY

SPECIFICATIONS

Rated voltage	36 V
Com. Protocol	RS-485/UART
BMS	Smart BMS
Voltage scope (V)	31 - 42V
Charge mode	CC-CV (4 pin Promovec charger)
Operation temperature charge	0°C - 45°C

MOUNTING PARAMETER

Position	Downtube
Weight (kg)	2,6 - 2,7
Controller position	Downtube / center
Charger	4 pin Promovec charger

MOUNTING

Downtube	50630 (see frame catalogue)
----------	------------------------------------



BATTERY OPTIONS

PART NO.	NAME	CAPACITY
50762-BL-C	DT1	7,8Ah, 36V, 281Wh
50757-BL-C	DT1	10,4Ah, 36V, 374Wh
50759-BL_C	DT1	12,8Ah, 36V, 482Wh

TESTS & CERTIFICATIONS

IP	IP 65
Certifications	CE / EN 15194
	ROHS /
	REACH
	UN 38,3, MSDS

DIMENSIONS

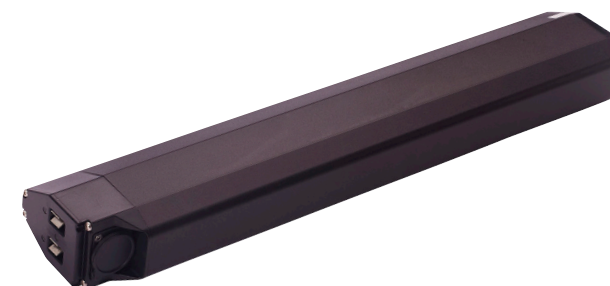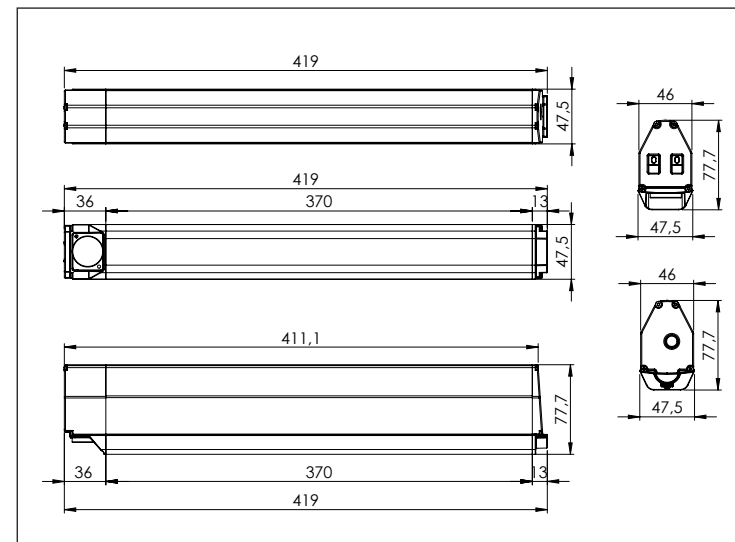

Promovec A/S
Brunbjergvej 2
DK-8240 Risskov

TEL. +45 7027 2623
FAX. +45 7027 2429
MAIL info@promovec.dk

Promovec® 
sustainable e-bikes