

CHAINCASE BATTERY

SPECIFICATIONS

Rated voltage	36 V
Com. Protocol	RS-485/UART
BMS	Smart BMS
Voltage scope (V)	31 - 42V
Charge mode	CC-CV (Type A Promovec charger)
Operation temperature charge	0°C - 45°C

MOUNTING PARAMETER

Position	Chaincase
Weight (kg)	1,9
Controller position	Center (chaincase)
Charger	Promovec charger, Small circular

MOUNTING

Chaincase	50630 (see frame catalogue)
-----------	------------------------------------

BATTERY OPTIONS



Part No.	Name	Capacity
50246-C	CC	9,6Ah, 36V, 345Wh

Available in different colors.

TESTS & CERTIFICATIONS

IP	IP 65
Certifications	CE / EN 15194/ ROHS / REACH UN 38,3, MSDS

DIMENSIONS

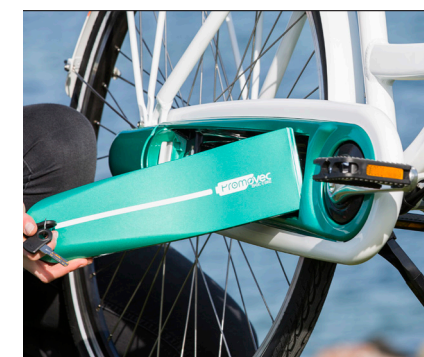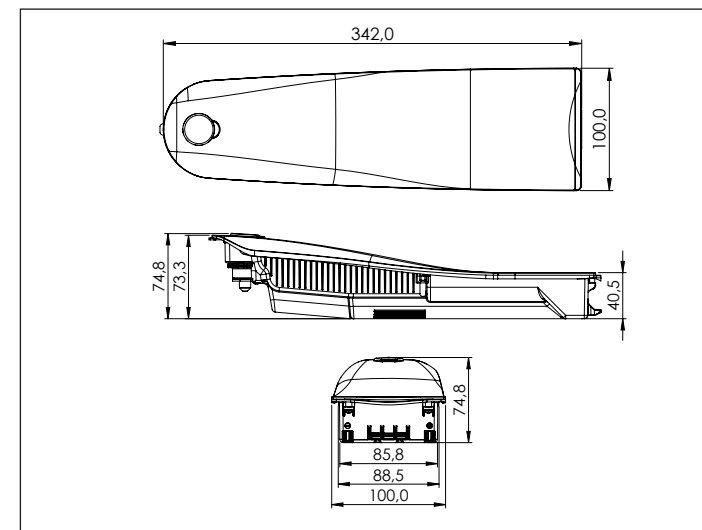

Promovec A/S
Langdyssen 6
DK-8200 Aarhus N

TEL. +45 7027 2623
FAX. +45 7027 2429
MAIL info@promovec.dk

Promovec® 
the e-bike solution