

BY PROMOVEC

CENTER CONNECT+ W/THROTTLE 51811

SPECIFICATIONS

| | |
|--------------|--------------------------|
| Assist | 5 steps |
| Battery | 5 levels |
| Light on/off | Yes |
| Walk-assist | Yes |
| Protocol | V2 |
| Plug | IP 66 |
| Position | Left & Center |

ADDITIONAL DATA

| | |
|---------------|----------------|
| Rated voltage | 36V/48V |
| Weight (g) | 50g |

MOUNTING PARAMETERS

| | |
|-------------------|-------------------------|
| Holder (mm) | Ø22, Ø25, Ø32 mm |
| Cable length (mm) | 800 mm* |
| Connector | V2 |

*01-08-2021 - Cable length change from 600 mm to 800 mm

TESTS & CERTIFICATIONS

| | |
|----------------|-------------------------------------|
| IP | IP 65 |
| Certifications | CE / EN 15194 / REACH / ROHS |

STANDALONE INTERFACE

| | |
|------------------|------------|
| Battery capacity | Yes |
| Assist level | Yes |
| Walk assist | Yes |
| Light controls | Yes |


INTERFACE

| | |
|----------|------------|
| Buttons | 5 |
| Throttle | Yes |

OPTIONS

| | |
|--------------|--------------|
| With buttons | 51812 |
|--------------|--------------|

DIMENSIONS

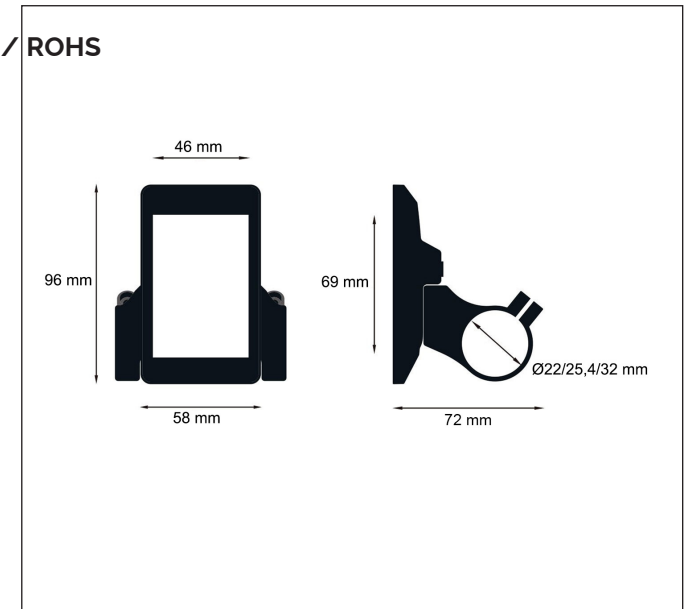

Promovec A/S
Brunbjergvej 2
DK-8240 Risskov

TEL. +45 7027 2623
FAX. +45 7027 2429
MAIL info@promovec.dk

Promovec® 
sustainable e-bikes